

solex



	Solex 3	Solex 10	Solex 15
	9 ~ 60Vdc		
	85 mA (@12V)	185 mA (@12V)	510 mA (@12V)
	40 mA (@24V)	88 mA (@24V)	240 mA (@24V)
	25 mA (@48V)	45 mA (@48V)	120 mA (@48V)
	Current values @ 12,24,and 48V are+/- 10%		
	0.28mm ² ~ 2.5mm ²		
	-25 °C ~ +70 °C		
	ABS V0 & PC		
	S = Type A = IP21C (IP54*) D/U = Type B = IP33C (IP65*)		
	1Hz		

*Product exceeds minimum requirements of EN54-3
See www.fulleon.com
Le produit dépasse les exigences minimum de EN54-3
Voir www.fulleon.com
Das Erzeugnis erfüllt die Mindestanforderungen von EN54-3.
Siehe www.fulleon.com
Il prodotto supera i requisiti minimi previsti dalla norma EN54-3
Vedi www.fulleon.com
Product overtreft de minimale vereisten van EN54-3.
Zie www.fulleon.com
El producto excede los requisitos mínimos de la norma EN54-3
Véase www.fulleon.com
Produkten överträffar minsta krav enligt EN54-3
Se www.fulleon.com













www.fulleon.com


Fulleon Ltd, Cwmbran, South Wales, U.K.

25-6018 Iss C



G207018

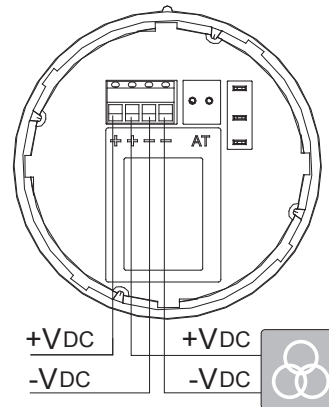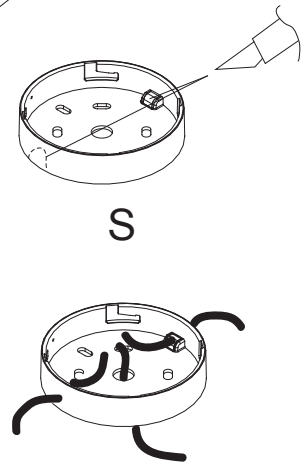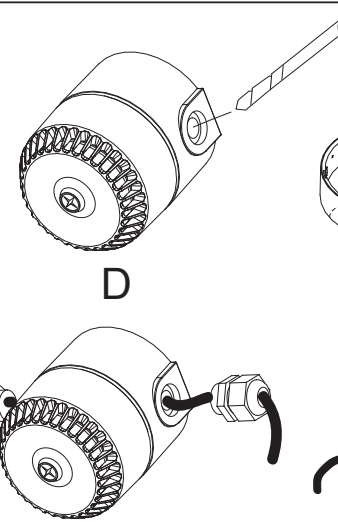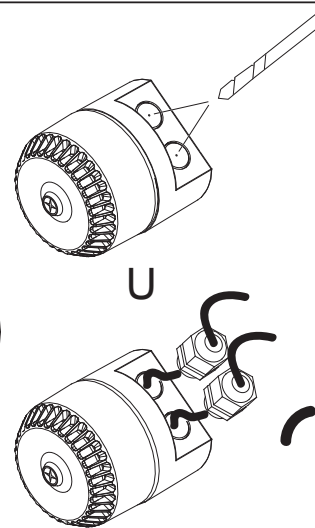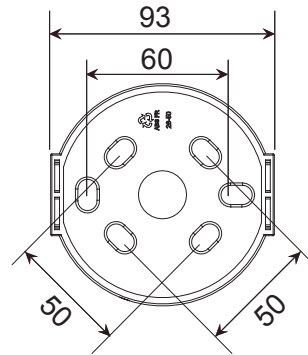





A/T

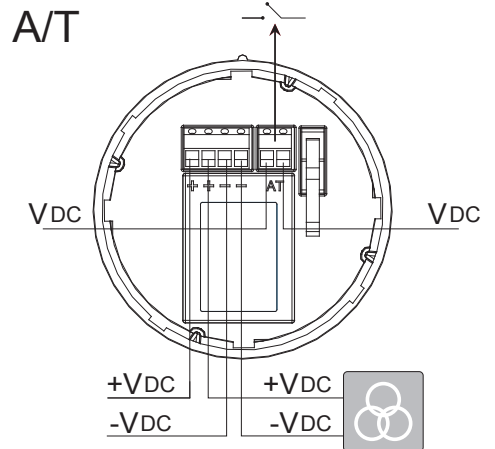

Not VDS Approved

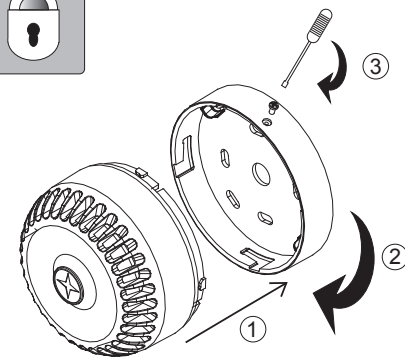

A/T



Not VDS Approved